

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. HYP-043 (4527/52)

First Named Inventor Zhipeng Lu, et al.

Title *Electrode for a Plasma Arc Torch Having an Improved  
Insert Configuration*

Filing Date Herewith

PTO  
514 U.S. 11963  
09/11/98**APPLICATION ELEMENTS**ADDRESS TO: **Box Patent Application  
Assistant Commissioner for Patents  
Washington, D.C. 20231**1. ☒ Fee Transmittal Form2. ☒ Specification and Drawings [Total Pages 17]

10 - Specification - ( pages)

06 - Claims - ( pages)

01 - Abstract - ( page)

03 - Sheets of Drawings - ( sheets)

☐ Formal  
☒ Informal3. ☐ Oath or Declaration [Total Pages ]a. ☐ Newly executed (original)b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 16 completed)


[Note Box 4 below]

4. ☐ Incorporation by Reference (usable if Box 3b is checked)The entire Disclosure of the prior application, from  
which a copy of the oath or declaration is supplied  
under Box 3b, is considered as being part of the  
disclosure of the accompanying application and is  
hereby incorporated by reference therein.5. ☐ Microfiche Computer Program (Appendix)6. ☐ Nucleotide and/or Amino Acid Sequence Submission☐ Computer Readable Copy☐ Paper Copy (identical to computer copy)☐ Statement verifying identity of above copies**ACCOMPANYING APPLICATION PARTS**7. ☐ 37 CFR 3.73(b) Statement (when there is an assignee)  
☐ Power of Attorney8. ☐ English Translation Document (if applicable)9. ☐ Information Disclosure Statement (IDS)/PTO-1449  
☐ Copies of IDS Citations10. ☐ Preliminary Amendment☐ Drawings [Total Sheets ]☐ Letter to Official Draftsperson Including  
Drawings [Total Pages ]11. ☒ Return Receipt Postcard12. ☒ Small Entity Statement(s)☐ Statements filed in prior application,  
(Status still proper and desired)13. ☐ Certified Copy of Priority Document(s)14. ☐ Deletion of Inventor(s)Signed statement attached deleting inventor(s) named in  
the prior application.15. ☐ Patent Application Data Entry Form16. ☐ Other:17. ☐ If a **CONTINUING APPLICATION**, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application Serial No. \_\_\_\_/\_\_\_\_.**Priority to the above application(s) is claimed under 35 U.S.C. 120.**

Prior application information: Examiner: \_\_\_\_\_. Group/Art Unit: \_\_\_\_\_.

18. ☐ **Priority - 35 U.S.C. 119**☐ Priority of application Serial No. \_\_\_\_\_ filed on \_\_\_\_\_ in \_\_\_\_\_ is claimed under 35 U.S.C. 119.☐ The certified copy has been filed in prior U.S. application Serial No. \_\_\_\_/\_\_\_\_ on \_\_\_\_\_.☐ The certified copy will follow.**CORRESPONDENCE ADDRESS**Direct all correspondence to: Patent Administrator  
Testa, Hurwitz & Thibault, LLP  
High Street Tower  
125 High Street  
Boston, MA 02110  
Tel. No.: (617) 248-7000  
Fax No.: (617) 248-7100**SIGNATURE BLOCK**Date: July 20, 1998  
Reg. No. 36,471  
Tel. No.: (617) 248-7369  
Fax No.: (617) 248-7100

Respectfully submitted,

  
Joseph A. Capraro, Jr.  
Attorney for Applicants  
Testa, Hurwitz & Thibault, LLP  
High Street Tower  
125 High Street  
Boston, MA 02110

**FEE TRANSMITTAL**

Note: Effective October 1, 1997.  
Patent fees are subject to annual revision

Complete if Known

Application Serial Number	
Filing Date	Herewith
First Named Inventor	Zhipeng Lu, et al.
Group Art Unit	
Examiner Name	
Attorney Docket No.	HYP-043 (4527/52)

**METHOD OF PAYMENT**

1. ☒ Payment Enclosed:  
☒ Check ☐ Money Order ☐ Other
2. ☒ The Commissioner is hereby authorized to credit or charge any fee indicated below to Deposit Account No. 20-0531.  
☐ Required Fees (copy of this sheet enclosed).  
☒ Additional fee required under 37 CFR 1.16 and 1.17.  
☒ Overpayment Credit.

**FEE CALCULATION****1. FILING FEE****Large Entity**

Fee (\$)	Fee Description	Fee Paid
790	Utility filing fee	790.00
330	Design filing fee	
150	Provisional filing fee	

	Number Filed	Number Extra	Rate	Amount
Total Claims	34	- 20 = 14	x \$ 22.00 =	308.00

	Number Filed	Number Extra	Rate	Amount
Independent Claims	4	- 3 = 1	x \$ 82.00 =	82.00

☒ Multiple Dependent Claim(s), if any \$270.00 = 270.00

TOTAL: 1,450.00

SMALL ENTITY DISCOUNT: 725.00

SUBTOTAL (1) (\$ 725.00)

**2. AMENDMENT CLAIM FEES**

Claims Remaining After Amend.	Highest No. Previously Paid For	Present Extra	Rate	Fee Paid
-------------------------------	---------------------------------	---------------	------	----------

Total	-	=	x \$ 22.00 =	
-------	---	---	--------------	--

Indep.	-	=	x \$ 82.00 =	
--------	---	---	--------------	--

<input type="checkbox"/> First Presentation of Multiple Dep. Claim			+ \$270.00 =	
--------------------------------------------------------------------	--	--	--------------	--

TOTAL: (\$)

SMALL ENTITY DISCOUNT: (\$)

SUBTOTAL (2) (\$)

**FEE CALCULATION (continued)****3. ADDITIONAL FEES**

Large Entity Fee (\$)	Small Entity Fee (\$)	Fee Description	Fee Paid
130	65	Surcharge - late filing fee or oath	
50	25	Surcharge - late provisional filing fee or	
130	130	Non-English specification	
2,520	2,520	For filing a request for reexamination	
110	55	Extension for reply within first month	
400	200	Extension for reply within second month	
950	475	Extension for reply within third month	
1,510	755	Extension for reply within fourth month	
2,060	1,030	Extension for reply within fifth month	
310	155	Notice of Appeal	
310	155	Filing a brief in support of an appeal	
270	135	Request for oral hearing	
130	130	Petitions to the Commissioner	
50	50	Petitions related to provisional applications	
240	240	Submission of Information Disclosure Statement (37 CFR 1.97(c))	
130	130	Submission of Information Disclosure Statement (37 CFR 1.97(d))	
790	395	Filing a submission after final rejection (37 CFR 1.129(a))	
790	395	For each additional invention to be examined (37 CFR 1.129(b))	
		Other (Specify)	

SUBTOTAL (3) (\$)

SUBTOTAL (1) 725.00

SUBTOTAL (2)

SUBTOTAL (3)

TOTAL (\$ 725.00)

**CORRESPONDENCE ADDRESS**


Direct all correspondence to:

Patent Administrator  
 Testa, Hurwitz & Thibault, LLP  
 High Street Tower  
 125 High Street  
 Boston, MA 02110  
 Tel. No.: (617) 248-7000  
 Fax No.: (617) 248-7100

**SIGNATURE BLOCK**

Date: July 20, 1998  
 Reg. No. 36,471  
 Tel. No.: (617) 248-7369  
 Fax No.: (617) 248-7100

Respectfully submitted,

  
 Joseph A. Capraro, Jr.  
 Attorney for Applicants  
 Testa, Hurwitz & Thibault, LLP  
 High Street Tower  
 125 High Street  
 Boston, MA 02110

### Inventor Information

Inventor One Given Name :: Zhipeng  
Family Name :: Lu  
Postal Address Line One :: 22 Renie Road  
City :: Hanover  
State/Province :: NH  
Postal or Zip Code :: 03755  
Citizenship:: People's Republic of China

Inventor One Given Name :: Couch  
Family Name :: Richard W.  
Name Suffix:: Jr.  
Postal Address Line One :: 29 Lyme Road  
City :: Hanover  
State/Province :: NH  
Postal or Zip Code :: 03755  
Citizenship:: USA

### Correspondence Information

Correspondence Customer Number :: 021323

### Application Information

Title Line One :: Electrode for a Plasma Arc Torch Having an Improved Insert Configuration  
Total Drawing Sheets :: 3  
Formal Drawings :: N  
Application Type :: Utility  
Docket Number :: HYP-043

### Representative Information

Representative Customer Number :: 021323

PATENT APPLICATION  
ATTORNEY DOCKET NO.: HYP-043  
(4527/52)

ELECTRODE FOR A PLASMA ARC TORCH  
HAVING AN IMPROVED INSERT CONFIGURATION

FIELD OF THE INVENTION

The invention relates generally to the field of plasma arc torches and systems. In particular, the invention relates to an electrode for use in a plasma arc torch having an improved insert configuration.

5 BACKGROUND OF THE INVENTION

Plasma arc torches are widely used in the processing (e.g., cutting and marking) of metallic materials. A plasma arch torch generally includes a torch body, an electrode mounted within the body, a nozzle with a central exit orifice, electrical connections, passages for cooling and arc control fluids, a swirl ring to control the fluid flow patterns, and a power supply. The torch produces a plasma arc, which is a constricted ionized jet of a plasma gas with high temperature and high momentum. The gas can be non-reactive, e.g. nitrogen or argon, or reactive, e.g. oxygen or air.

10  
15 In process of plasma arc cutting or marking a metallic workpiece, a pilot arc is first generated between the electrode (cathode) and the nozzle (anode). The pilot arc ionizes gas passing through the nozzle exit orifice. After the ionized gas reduces the electrical resistance between the electrode and the workpiece, the arc then transfers from the nozzle to the workpiece. The torch is operated in this transferred plasma arc mode, characterized by the conductive flow of ionized gas from the electrode to the workpiece, for the cutting or marking the workpiece.

In a plasma arc torch using a reactive plasma gas, it is common to use a copper electrode with an insert of high thermionic emissivity material. The insert is press fit into the bottom end of the electrode so that an end face of the insert, which defines an emission surface, is exposed. The insert is typically made of either hafnium or zirconium and is cylindrically shaped.

5 While electrodes with traditional cylindrical inserts operate as intended, manufacturers continuously strive to improve the service life of such electrodes, particularly for high current processes. It is therefore a principal object of the present invention to provide an electrode having an insert configuration that improves the service life of the electrode.

#### SUMMARY OF THE INVENTION

10 A principal discovery of the present invention is the recognition that certain inherent limitations exist in the traditional cylindrical insert design. These limitations serve to limit the service life of the electrode, particularly for high current processes. For a traditional cylindrical insert, the size of the emitting surface is increased for higher current capacity operations. The high thermionic emissivity insert, however, has a poor thermal conductivity relative to the electrode body (e.g., hafnium has a thermal conductivity which is about 5% of the thermal conductivity of copper). This makes the removal of heat from the center of the insert to the surrounding electrode body, which serves as heat sink, difficult.

15 It is known to limit the diameter of the insert to a specified dimension, and this approach is successful up to a particular current level. When the torch operates at a current that exceeds  
20 that level, the centerline temperature of the insert exceeds the boiling point of the insert material, causing rapid loss of the insert material.

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500

The present invention features an electrode having an insert designed to facilitates the removal of heat from the insert resulting in an improved service life of the electrode. In one aspect, the invention features an electrode for a plasma arc torch. The electrode comprises an elongated electrode body formed of a high thermal conductivity material. The material can be copper, silver, gold, platinum, or any other high thermal conductivity material with a high melting and boiling point and which is chemically inert in a reactive environment. A bore is disposed in a bottom end of the electrode body. The bore can be cylindrical or ringed-shaped. A ring-shaped insert, comprising a high thermionic emissivity material (e.g., hafnium or zirconium), is disposed in the bore. In one embodiment, the insert also comprises the high thermal conductivity material.

In one embodiment, the insert comprises a closed end which defines an exposed emission surface. In another embodiment, the insert comprises a first ring-shaped member formed of the high thermionic emissivity material and a second cylindrical member formed of high thermal conductivity material disposed in the first ring-shaped member. In yet another embodiment, the insert comprises a first ring-shaped member comprising the high thermionic emissivity material disposed in a second ring-shaped member formed of high thermal conductivity material. In another embodiment, the insert comprises a rolled pair of adjacent layers, the first layer comprising the high thermal conductivity material and the second layer comprising the high thermionic emissivity material.

In another aspect, the invention features an electrode for a plasma arc torch comprising an elongated body and an insert. The elongated body has a bore formed in an end face. The insert

is disposed in the bore and comprises a high thermal conductivity material and a high thermionic emissivity material.

In one embodiment, the insert comprises a rolled pair of adjacent layers, the first layer comprising the high thermal conductivity material and a second layer comprising the high thermionic emissivity material. The first layer can be in the form of hafnium plating and the second layer can be a copper foil. In another embodiment, the electrode body has a ring-shaped bore, and the insert is ring-shaped. The insert can further comprise a closed end which defines an exposed emission surface.

In another embodiment, the insert comprises a cylindrically-shaped, high thermal conductivity material. The material has a plurality of parallel bores disposed in a spaced arrangement. An element, comprising high thermionic emissivity material, is being disposed in each of the plurality of bores.

In still another aspect, the invention features a method of manufacturing an electrode for a plasma arc torch. A bore is formed at a bottom end of the elongated electrode body, which is formed of a high thermal conductivity material, relative to a central axis through the electrode body. The bore can be cylindrical or ring-shaped. An insert comprising a high thermionic emissivity material is inserted into the bore. The insert can be cylindrical or ring-shaped and can also comprise high thermal conductivity material.

In one embodiment, the insert is ringed-shaped and can have one closed end which defines an exposed emission surface. In another embodiment, the insert is formed from a first ring-shaped member comprising high thermionic emissivity material and a second cylindrical member comprising high thermal conductivity material disposed in the ring-shaped first insert.

The insert can be disposed a cylindrical bore formed in the electrode body having an inner bore and a deeper outer bore, such that the first member fits in the outer bore and the second member fits in the inner bore. Alternatively, the insert can be disposed in a cylindrical bore formed in the electrode body having an outer bore and a deeper inner bore, such that the first member fits in the outer bore and the second member fits in the inner bore.

In another embodiment, the insert is formed by sintering a composite powder mixture of a high thermal conductivity material and a high thermionic emissivity material. For example, the composite powder mixture comprises grains of the thermal conductivity material coated with the high thermionic emissivity material. In another embodiment, the insert is formed of a cylindrically-shaped, high thermal conductivity material. The material has a plurality of parallel bores disposed in a spaced arrangement. An element, comprising high thermionic emissivity material, is being disposed in each of the plurality of bores.

In another embodiment, the insert is formed by placing a first layer comprising the high thermal conductivity material adjacent a second layer comprising the high thermionic emissivity material and rolling the adjacent layers.

An electrode incorporating the principles of the present invention offers significant advantages of existing electrodes. One advantage of the invention is that double arcing due to the deposition of high thermionic emissivity material on the nozzle is minimized by the improved insert. As such, nozzle life and cut quality are improved. Another advantage is that the service life is improved especially for higher current operations (e.g., >200A).



## BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other objects, features and advantages of the invention will become apparent from the following more particular description of preferred embodiments of the invention, as illustrated in the accompanying drawings. The drawings are not necessarily to  
5 scale, emphasis instead being place on illustrating the principles of the present invention.

FIG. 1 is a cross-sectional view of a conventional plasma arc cutting torch.

FIG. 2 is a partial cross-sectional view of an electrode having an insert configuration incorporating the principles of the present invention.

FIG. 3 is a partial cross-sectional view of an electrode having another insert  
10 configuration.

FIG. 4 is a partial cross-sectional view of an electrode having another insert  
15 configuration.

FIG. 5 is a partial cross-sectional view of an electrode having another insert  
20 configuration.

FIG. 6 is a cross-sectional view of another insert configuration for use in an electrode.

FIG. 7 is a cross-sectional view of another insert configuration for use in an electrode.

FIG. 8 is a cross-sectional view of another insert configuration for use in an electrode.

FIG. 9 is a cross-sectional view of another insert configuration for use in an electrode.

## DETAILED DESCRIPTION

20 FIG. 1 illustrates in simplified schematic form a typical plasma arc cutting torch 10 representative of any of a variety of models of torches sold by Hypertherm, Inc. in Hanover, New Hampshire. The torch has a body 12 which is typically cylindrical with an exit orifice 14 at

a lower end 16. A plasma arc 18, i.e. an ionized gas jet, passes through the exit orifice and attaches to a workpiece 19 being cut. The torch is designed to pierce and cut metal, particularly mild steel, the torch operates with a reactive gas, such as oxygen or air, as the plasma gas to form the transferred plasma arc 18.

5           The torch body 12 supports a copper electrode 20 having a generally cylindrical body 21. A hafnium insert 22 is press fit into the lower end 21a of the electrode so that a planar emission surface 22a is exposed. The torch body also supports a nozzle 24 which spaced from the electrode. The nozzle has a central orifice that defines the exit orifice 14. A swirl ring 26 mounted to the torch body has a set of radially offset (or canted) gas distribution holes 26a that impart a tangential velocity component to the plasma gas flow causing it to swirl. This swirl creates a vortex that constricts the arc and stabilizes the position of the arc on the insert.

10           In operation, the plasma gas 28 flows through the gas inlet tube 29 and the gas distribution holes in the swirl ring. From there, it flows into the plasma chamber 30 and out of the torch through the nozzle orifice. A pilot arc is first generated between the electrode and the nozzle. The pilot arc ionizes the gas passing through the nozzle orifice. The arc then transfers from the nozzle to the workpiece for the cutting the workpiece. It is noted that the particular construction details of the torch body, including the arrangement of components, directing of gas and cooling fluid flows, and providing electrical connections can take a wide variety of forms.

15           For conventional electrode designs, the diameter of the insert is specified for a particular operating current level of the torch. However, when the torch operates at a current that exceeds that level, the centerline temperature of the insert exceeds the boiling point of the insert material, causing rapid loss of the insert material.

Referring to FIG. 2, a partial cross-sectional view of an electrode having an insert designed to facilitate the removal of heat from the insert resulting in an improved electrode service life is shown. The electrode 40 comprises a cylindrical electrode body 42 formed of a high thermal conductivity material. The material can be copper, silver, gold, platinum, or any other high thermal conductivity material with a high melting and boiling point and which is chemically inert in a reactive environment. A bore 44 is drilled in a tapered bottom end 46 of the electrode body along a central axis (X1) extending longitudinally through the body. As shown, the bore 44 is U-shaped (i.e., characterized by a central portion 44a having a shallower depth than a ringed-shaped portion 44b). An insert 48 comprising high thermionic emissivity material (e.g., hafnium or zirconium) is press fit in the bore. The insert 48 is ring-shaped and includes a closed end which defines an emission surface 49. The emission surface 49 is exposable to plasma gas in the torch body.

FIG. 3 is a partial cross-sectional view of an electrode having another insert configuration. The electrode 50 comprises a cylindrical electrode body 42 formed of high thermal conductivity material. A ring-shaped bore 54 is drilled in the bottom end 56 of the electrode body relative to the central axis (X2) extending longitudinally through the body. The bore 54 can be formed using a hollow mill or end mill drilling process. A ring-shaped insert 58 comprising high thermionic emissivity material is press fit in the bore. The insert 58 includes an end face which defines the emission surface 59.

Referring to FIG. 4, a partial cross-sectional view of an electrode having another insert configuration is shown. The electrode 60 comprises a cylindrical electrode body 62 formed of high thermal conductivity material. A bore 64 is drilled in a tapered bottom end 66 of the electrode body along a central axis (X3) extending longitudinally through the body. As shown,

the bore 64 is two-tiered (i.e., characterized by a central portion 64a having a deeper depth than a ringed-shaped portion 64b). A ring-shaped insert 68 comprising high thermionic emissivity material is press fit in the bore. The insert 68 includes an end face which defines the emission surface 69. A cylindrical insert 67, comprising high thermal conductivity material, is press fit into the central portion 64a of the bore 64 adjacent the insert 68.

FIG. 5 is a partial cross-sectional view of an electrode having another insert configuration. The electrode 70 comprises a cylindrical electrode body 72 formed of high thermal conductivity material. A cylindrical bore 74 is drilled in a tapered bottom end 76 of the electrode body along a central axis (X4) extending longitudinally through the body. A cylindrical insert 77, comprising high thermal conductivity material portion 78a and a ring-shaped high thermionic emissivity material portion 78b, is press fit into the bore 74. The ring-shaped portion 78b includes an end face which defines the emission surface 79.

Referring to FIG. 6, a cross-sectional view of another insert configuration incorporating the principles of the present invention is shown. The insert 80 is a composite structure comprising adjacent layers of high thermal conductivity material and high thermionic emissivity material. More specifically, a layer 82 of high thermal conductivity material is placed on a layer 84 of high thermionic emissivity material. The two layers are rolled up to form a “jelly roll” structure. In one embodiment, the layer of high thermal conductivity material is a copper foil. The foil is plated with a layer of high thermionic emissivity material such as hafnium. The composite structure is rolled to form a cylindrical insert.

FIG. 7 is a cross-sectional view of another insert configuration. The insert 86 is a composite structure comprising both high thermal conductivity material and high thermionic emissivity material. The insert includes a cylindrical member 86 formed of high thermal

conductivity material. A plurality of parallel bores 88 disposed in a spaced arrangement are formed in the member 86. An element 90, comprising high thermionic emissivity material, is disposed in each of the plurality of bores 88.

Referring to FIG. 8, a cross-sectional view of another insert configuration is shown. The insert 92 is formed by sintering a composite powder mixture of a high thermal conductivity material and a high thermionic emissivity material. The result is a composite material including grains of high thermal conductivity material 94 and grains of high thermionic emissivity material 96.

FIG. 9 a cross-sectional view of another insert configuration for an electrode. The insert 98 is formed of composite powder mixture comprising grains 100 of the thermal conductivity material coated with the high thermionic emissivity material 102.

The dimensions of the inserts 48, 58, 68, 78, 80, 86, 92 and 98 are determined as a function of the operating current level of the torch, the diameter (A) of the cylindrical insert and the plasma gas flow pattern in the torch.

#### EQUIVALENTS

While the invention has been particularly shown and described with reference to specific preferred embodiments, it should be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention as defined by the appended claims. For example, although the steps for manufacturing the electrode are described in a particular sequence, it is noted that their order can be changed. In addition, while the various inserts described herein are characterized as ringed-shaped, cylindrical and the like, such inserts can be substantially ringed-shaped, cylindrical and the like.

What is claimed is:

- 1 1. An electrode for a plasma arc torch, the electrode comprising:  
2 an elongated electrode body formed of a high thermal conductivity material and having a  
3 bore disposed in a bottom end of the electrode body; and  
4 a ring-shaped insert comprising a high thermionic emissivity material disposed in the  
5 bore.
- 1 2. The electrode of claim 1 wherein the bore is ring-shaped.
- 1 3. The electrode of claim 1 wherein the high thermionic emissivity material is hafnium or  
2 zirconium.
- 1 4. The electrode of claim 1 wherein the insert further comprises a closed end which defines  
2 an exposed emission surface.
- 1 5. The electrode of claim 1 wherein the insert comprises a first ring-shaped member formed  
2 of a high thermionic emissivity material and a second cylindrical member formed of a high  
3 thermal conductivity material disposed in the first ring-shaped member.
- 1 6. The electrode of claim 1 wherein the insert comprises a first ring-shaped member  
2 comprising of a high thermionic emissivity material disposed in a second ring-shaped member  
3 formed of a high thermal conductivity material.
- 1 7. The electrode of claim 5 or 6 wherein the second insert comprises copper, silver, gold, or  
2 platinum.

1 8. The electrode of claim 10 wherein the insert comprises a rolled pair of adjacent layers,  
2 the first layer comprising the high thermal conductivity material and a second layer comprising  
3 the high thermionic emissivity material.

1 9. The electrode of claim 1 wherein the insert further comprises a high thermal conductivity  
2 material.

1 10. An electrode for a plasma arc torch, the electrode comprising:  
2 an elongated electrode body formed of a high thermal conductivity material and having a  
3 bore disposed in a bottom end of the electrode body; and

4 an insert disposed in the bore and comprising a high thermal conductivity material and a  
5 high thermionic emissivity material.

6 11. The electrode of claim 10 wherein the high thermionic emissivity material is hafnium or  
7 zirconium.

8 12. The electrode of claim 10 wherein the a high thermal conductivity material comprises  
9 copper, silver, gold, or platinum.

1 13. The electrode of claim 10 wherein the insert comprises a rolled pair of adjacent layers,  
2 the first layer comprising the high thermal conductivity material and a second layer comprising  
3 the high thermionic emissivity material.

1 14. The electrode of claim 13 wherein the first layer comprises hafnium plating and the  
2 second layer comprises a copper foil.

1 15. The electrode of claim 10 wherein the electrode body has a ring-shaped bore and the  
2 insert is ring-shaped.

1 16. The electrode of claim 15 wherein the insert further comprises a closed end which defines  
2 an exposed emission surface.

1 17. The electrode of claim 10 wherein the insert comprises:

2 a cylindrical high thermal conductivity material having a plurality of parallel bores  
3 disposed in a spaced arrangement; and

4 a plurality of elements comprising the high thermionic emissivity material, each member  
5 being disposed in one of the plurality of bores.

1 18. A method of manufacturing an electrode for a plasma arc torch comprising:

2 a) providing an elongated electrode body formed of a high thermal conductivity material;

3 b) forming a bore at a bottom end of the elongated electrode body relative to a central  
4 axis through the electrode body; and

5 c) inserting a ring-shaped insert comprising a high thermionic emissivity material in the  
6 bore.

1 19. The method of claim 18 wherein step b) comprises:

2 b1) forming a ring-shaped bore.

1 20. The method of claim 19 wherein step c) comprises:

2 c1) inserting in the bore an insert having one closed end which defines an exposed  
3 emission surface.

1 21. The method of claim 18 wherein step b) comprises:

2 b1) forming a cylindrical bore.



1 22. The method of claim 21 wherein step b) comprises:

2 b1) forming the insert from a first ring-shaped member comprising a high thermionic  
3 emissivity material and a second cylindrical member comprising a high thermal conductivity  
4 material disposed in the ring-shaped first insert.

1 23. The method of claim 22 wherein step b) comprises:

2 b1) forming a cylindrical bore having an inner bore and a deeper outer bore, such that the  
3 first member fits in the outer bore and the second member fits in the inner bore.

1 24. The method of claim 22 wherein step b) comprises:

2 b1) forming a cylindrical bore having an outer bore and a deeper inner bore, such that the  
3 first member fits in the outer bore and the second member fits in the inner bore.

1 25. The method of claim 18 wherein step c) further comprises:

2 c1) forming the insert from a composite powder mixture of a high thermal conductivity  
3 material and a high thermionic emissivity material.

1 26. The method of claim 25 wherein the composite powder mixture comprises grains of the  
2 thermal conductivity material coated with the high thermal conductivity material.

1 27. The method of claim 18 wherein step c) further comprises forming the insert by:

2 c1) forming a plurality of parallel bores disposed in a spaced arrangement within a  
3 cylindrical high thermal conductivity material; and

4 c2) positioning each of a plurality of elements comprising the high thermionic emissivity  
5 material in a respective one of the plurality of bores.

- 1 28. The method of claim 18 wherein step c) further comprises forming the insert by:
- 2 c1) placing a first layer comprising the high thermal conductivity material adjacent a
- 3 second layer comprising the high thermionic emissivity material; and
- 4 c2) rolling the adjacent layers.
- 5 29. A method of manufacturing an electrode for a plasma arc cutting torch, comprising:
- 6 a) providing an elongated electrode body formed of a high thermal conductivity material;
- 7 b) forming a bore at a bottom end of the elongated electrode body relative to a central
- 8 axis extending longitudinally through the electrode body;
- 9 c) forming an insert comprising a high thermal conductivity material and a high
- 10 thermionic emissivity material; and
- 11 d) inserting in the bore of the electrode body.
- 12 30. The method of claim 29 wherein step c) comprises:
- 13 c1) providing a first layer of high thermal conductivity material and disposed adjacent a
- 14 second layer of high thermionic emissivity material; and
- 15 c2) rolling the adjacent layers.
- 16 31. The method of claim 29 wherein step c) comprises the steps of:
- 17 c1) forming a composite powder comprising the high thermal conductivity material and
- 18 the high thermionic emissivity material; and
- 19 c2) sintering the powder to form the insert.

1 32. The method of claim 31 wherein step c1) comprises:

2 c11) coating grains of high thermionic emissivity material with the high thermal  
3 conductivity material.

4 33. The method of claim 28 wherein step c) comprises:

5 c1) forming a plurality of parallel bores disposed in a spaced arrangement within the high  
6 thermal conductivity material; and

7 c2) positioning each of a plurality of elements comprising the high thermionic emissivity  
8 material in a respective one of the plurality of bores.

## ABSTRACT OF THE DISCLOSURE

1           An electrode for use in a plasma arc torch has an insert designed to improve the service  
2 life of the electrode, particularly for high current processes. The electrode comprises an  
3 elongated electrode body formed of a high thermal conductivity material and having a bore  
4 disposed in a bottom end of the electrode body. The bore can be cylindrical or ring-shaped. An  
5 insert comprising a high thermionic emissivity material, and in some embodiments, a high  
6 thermal conductivity material, is disposed in the bore. The insert can be ringed-shaped or  
7 cylindrical.

294JAC4527/52.A612527-1



FIG. 2

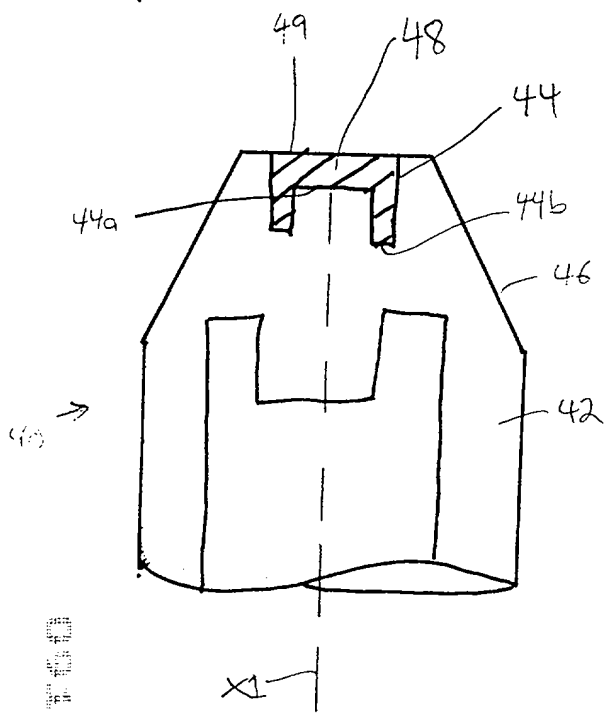


FIG. 3

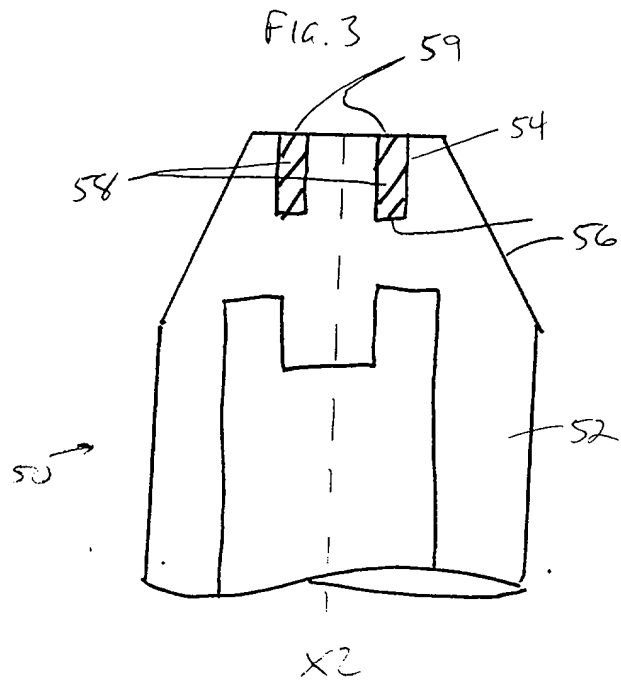


FIG. 4

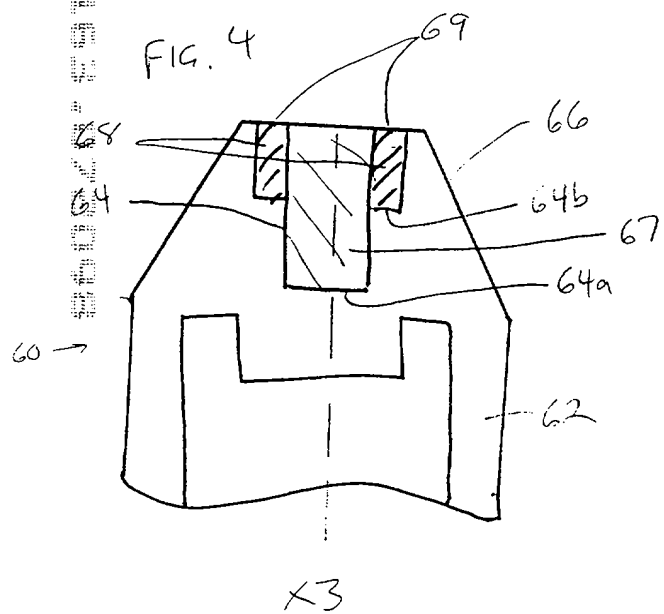


FIG. 5

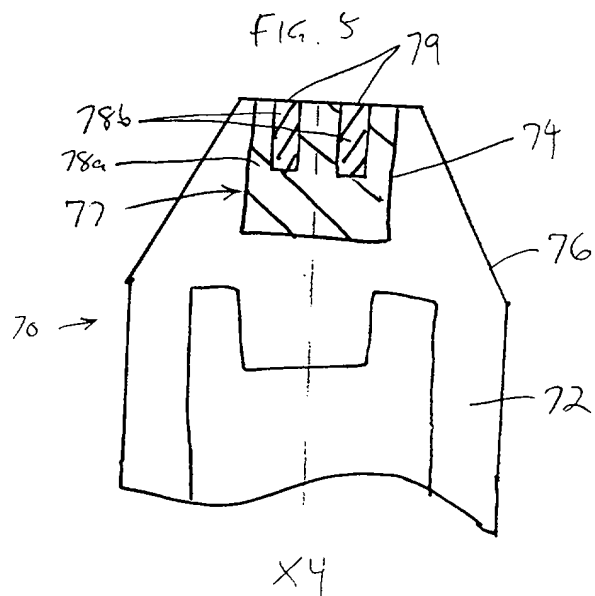


FIG. 6

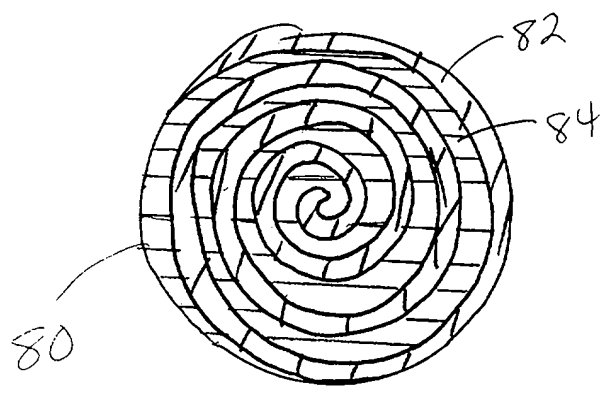


FIG. 8

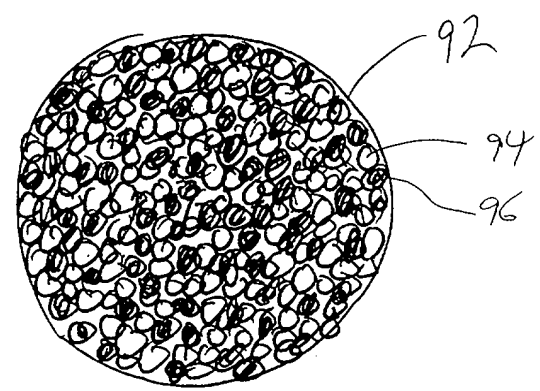


FIG. 7



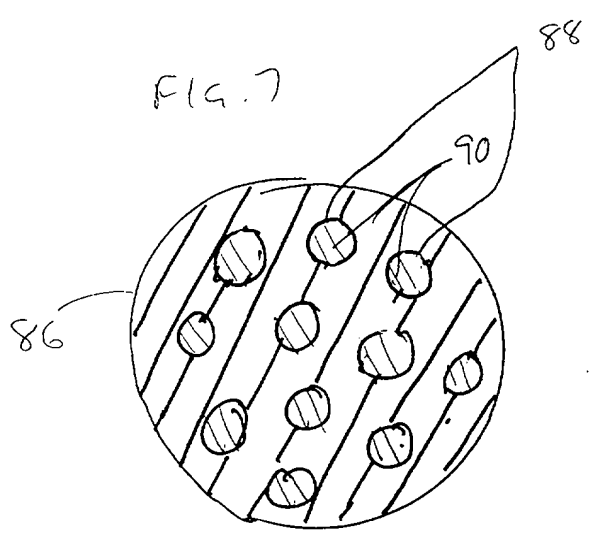


FIG. 9

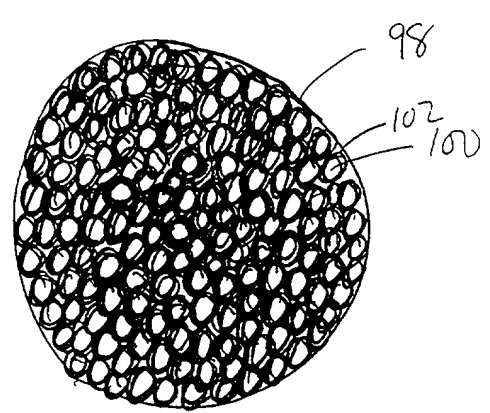

# United States Patent & Trademark Office

Office of Initial Patent Examination -- Scanning Division

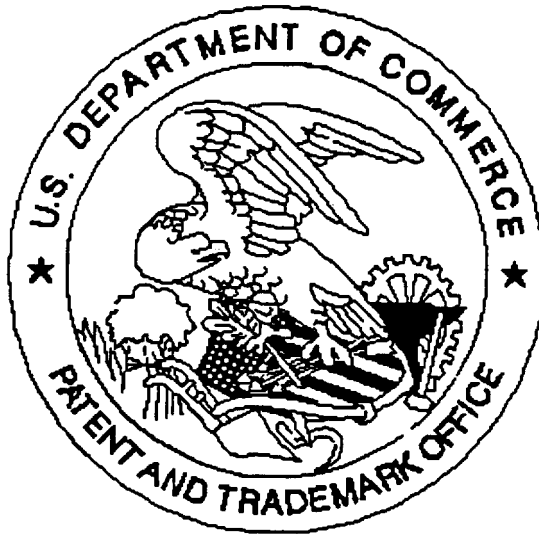

## Application deficiencies found during scanning:

1. Application papers are not suitable for scanning and are not in compliance with 37 CFR 1.52 because:
  - ☐ All sheets must be the same size and either A4 (21 cm x 29.7 cm) or 8-1/2" x 11". Pages \_\_\_\_\_ do not meet these requirements.
  - ☐ Papers are not flexible, strong, smooth, non-shiny, durable, and white.
  - ☐ Papers are not typewritten or mechanically printed in permanent ink on one side.
  - ☐ Papers contain improper margins. Each sheet must have a left margin of at least 2.5 cm (1") and top, bottom and right margins of at least 2.0 cm (3/4").
  - ☐ Papers contain hand lettering.
2. Drawings are not in compliance and were not scanned because:
  - ☐ The drawings or copy of drawings are not suitable for electronic reproduction.
  - ☐ All drawings sheets are not the same size. Pages must be either A4 (21 cm x 29.7 cm) or 8-1/2" x 11".
  - ☐ Each sheet must include a top and left margin of at least 2.5 cm (1"), a right margin of at least 1.5 cm (9/16") and a bottom margin of at least 1.0 cm (3/8").
3. Page(s) \_\_\_\_\_ are not of sufficient clarity, contrast and quality for electronic reproduction.
4. Page(s) \_\_\_\_\_ are missing.
5. OTHER: NO DECLARATION